



Drawing Number
SD/700/11


- Notes
- All dimensions are in millimetres
 - Position of humps to comply with the Highways (Road Humps) Regulations 1999.
 - Position of humps and gullies to be approved by the Engineer prior to construction.
 - Length of hump to be determined by the overall road layout.
 - For kerb and footway details see SD/1100/1 and 2.
 - Continuous edge of carriageway lines 100 wide are required on both sides of the carriageway and must extend for 6000 either side of hump.
 - Centre line markings to Dwg. 1004, 9000 module, 100 wide, are required, 6000 mark to be centred over hump.
 - Tack coat K1-40 or K1-60 to BS 434-1 to be used over whole area of hump prior to surfacing.
 - Hump material to be 10mm DBM minimum thickness 35mm.
 - Vertical tolerances to be + / - 10mm

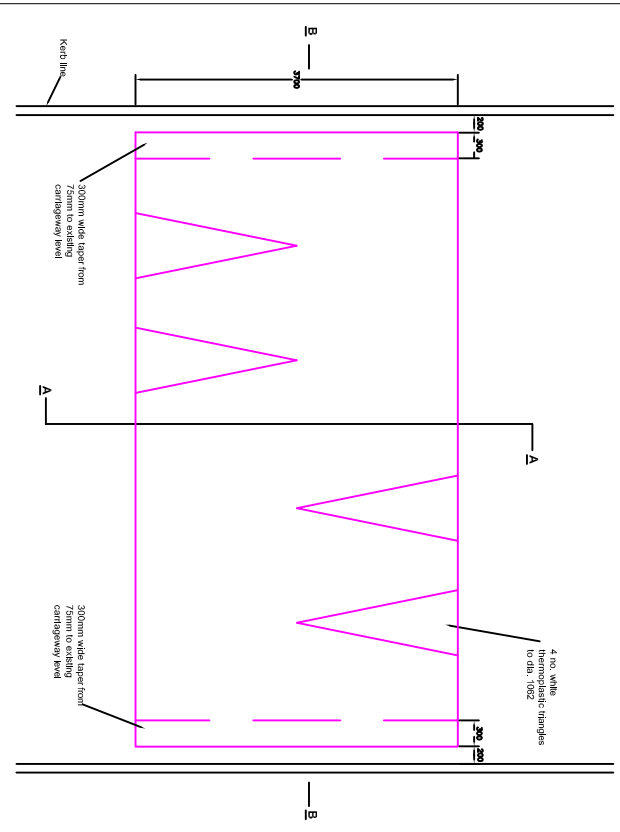


Plan View

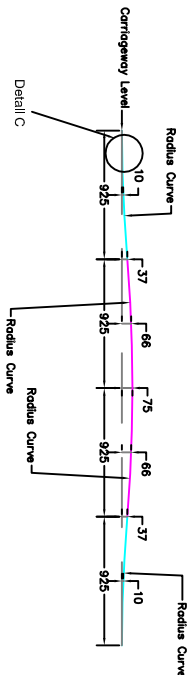

Section A-A

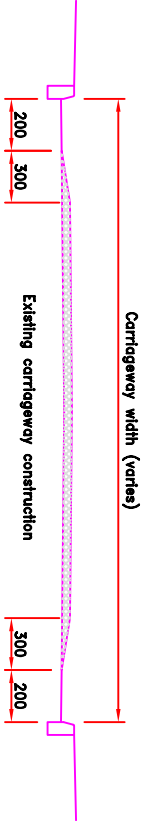

SECTION B-B

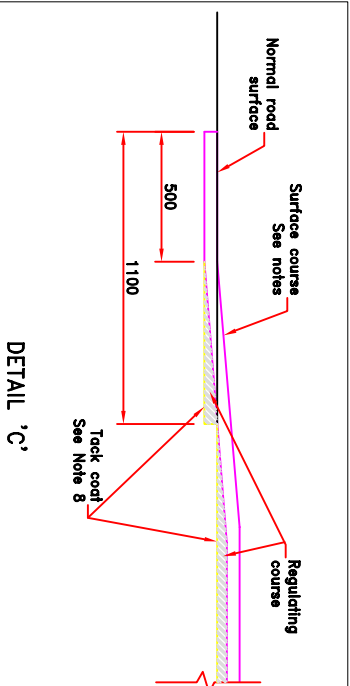

DETAIL 'C'

Project
STANDARD DRAWINGS
SINUSOIDAL ROAD HUMPS

Client
Community Services Directorate
Town Hall, St. Ives Road
Maldenhead, Berks,
SL6 1RF



Tel: 01628 798888
Fax: 01628 796774
http://www.rbwm.gov.uk

Drawing No.	SD/700/11	
Scale	NOT TO SCALE	
Drawn	JSW	Checked RB
Approved	JR	Date JUL 06

Rev	Date	Notes revised and updated	Checked
A	07/06		RB

Do not scale this drawing

Reproduced from the Ordnance Survey Mapping with the permission of the Controller of Her Majesty's Stationary Office. Copyright © 1999. Unauthorised reproduction infringes Crown Copyright and may be subject to prosecution under the provisions of the Copyright Act 1988 and Intellectual Property Act 1988.